

AIR DRIVEN PUMP UNITS

TorqLite's air driven pump units have been designed for use with all TorqLite tooling where speed of operation is essential. They are easy to use, perform well, and are incredibly reliable.


TorqLite offers air driven pump units in a range of pressures and flow rates.



SPECIFICATION	STANDARD FLOW RATE	HIGH FLOW RATE
Available output pressure	1000 bar, 1500 bar & 2500 bar (14500 psi, 21750 psi & 36250 psi)	1000 bar, 1500 bar & 2500 bar (14500 psi, 21750 psi & 36250 psi)
Consumption of free air	800 litres per min. (28 std. cubic ft. per min.)	1600 litres per min. (56 std. cubic ft. per min.)
Air pressure required	4 - 7 bar (60 - 100 psi)	4-7 bar (60 - 100 psi)
Weight (without oil)	19.5 kg (42.9 lbs)	23 kg (50.6 lbs)
Oil reservoir size	8.5 litre (0.3 cubic ft.)	8.5 litre (0.3 cubic ft.)
Recommended oil	ISO-10, ISO-32 or ISO-46	ISO-10, ISO-32 or ISO-46


OIL FLOW RATE - STANDARD

Output pressure (bar)

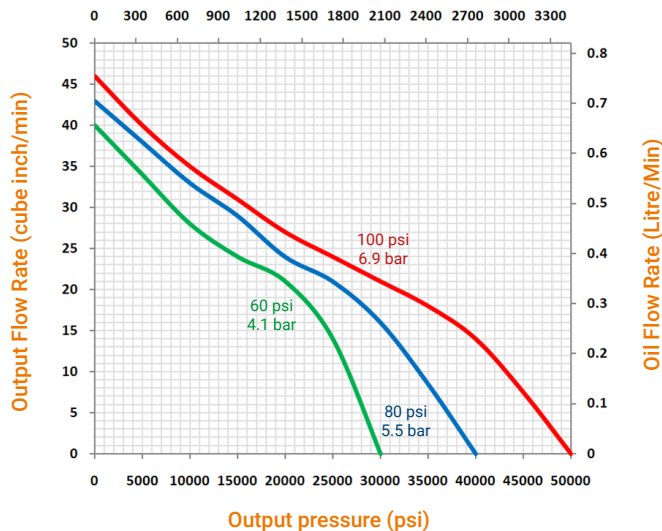

OIL FLOW RATE - HIGH FLOW

Output pressure (bar)

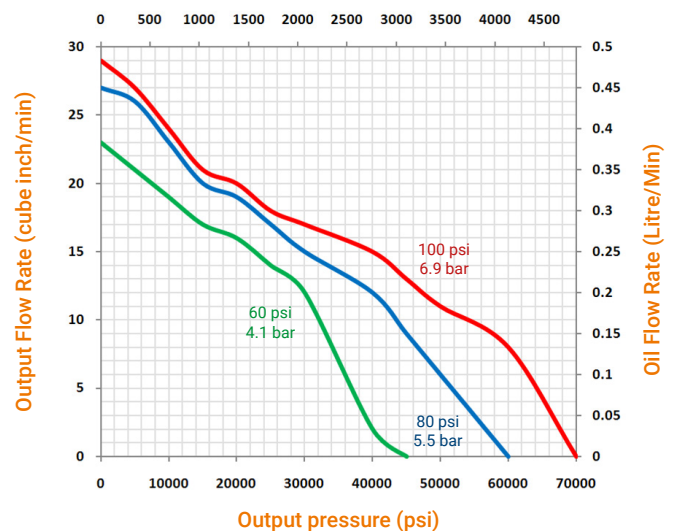

**Manufacturing, R&D,
and Operations**

Address: 8 Dufresne Loop Luling, LA 70070
Tel: 985-785-3075
Email: info@torqlite.com
www.torqlite.com

Sales Headquarters

Address: 5335 Brystone Dr. Houston, TX 77041
Tel: 713-983-7171
Email: sales@torqlite.com
www.torqlite.com