


HIGH FLOW STAINLESS STEEL AIR PUMP

TorqLite's higher oil flow, stainless steel air driven hydraulic pump has been designed for use in a corrosive environment such as Subsea. The pump has a large 15-litre oil reservoir and is compatible with all Torqlite 1500-bar tooling. It is ideal for projects where speed of operation is essential.




SPECIFICATION

- Mounted in a stainless steel transportable frame.
- 1600 litres air per minute (56 standard cubic feet per minute).
- Air pressure required 4-7 bar (60-100 psi).
- 31kg.
- Oil reservoir 15 litre ISO 10, 32, 46.
- Hydraulic Oil.
- Dual Scale 0-2000 bar (0-29000 psi) pressure gauge.
- 1500 bar working pressure.
- CEJN 116 hydraulic connection.

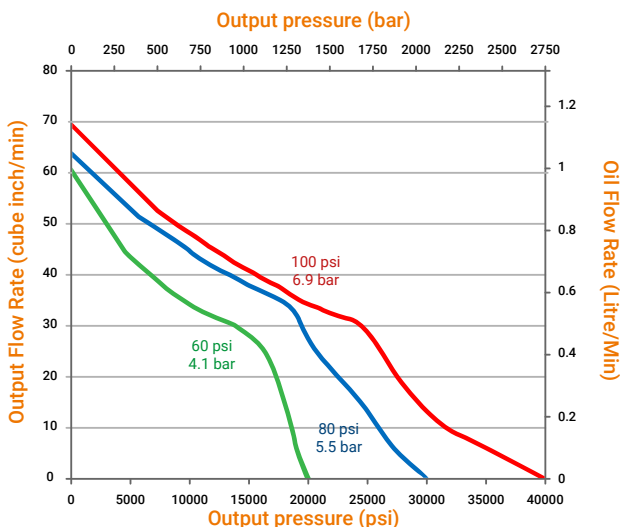

FEATURES

- Offers air/hydraulic pump and high pressure oil outlet with a self-sealing quick connect coupling.
- Easy to use.
- All tools are pressure tested and issued with a test certificate.

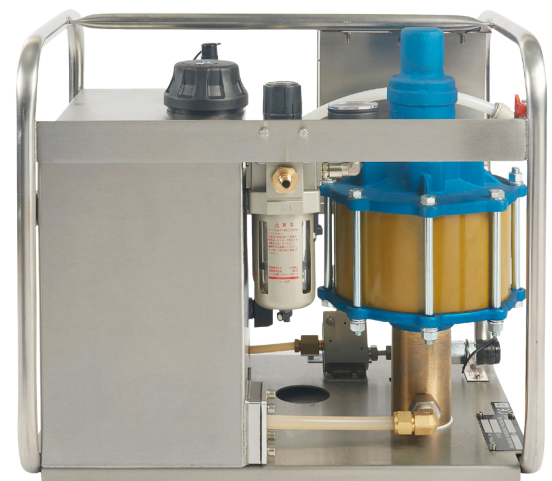

Manufacturing, R&D, and Operations

Address: 8 Dufresne Loop Luling, LA 70070
 Tel: 985-785-3075
 Email: info@torqlite.com
 www.torqlite.com

Sales Headquarters

Address: 5335 Brystone Dr. Houston, TX 77041
 Tel: 713-983-7171
 Email: sales@torqlite.com
 www.torqlite.com