


1500 BAR HOSE REEL STAND & DOWNLINE HOSE

This hand operated hose reel and stand is made from tubular steel finished in yellow paint, epoxy marine powder coat.

The oil feed from the pump is to the end of the reel shaft through a quick connect nipple. The inner end of the hose is attached to the reel shaft.

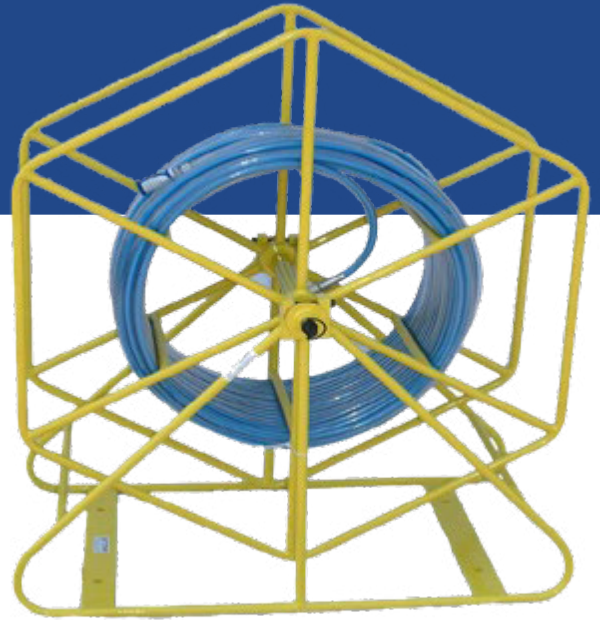

SPECIFICATION

TorqLite's flexible hydraulic hoses have been designed for use with TorqLite tools. **They** are manufactured from a multi-spiral steel reinforced polymer.

Each end of the hose is fitted with a 1/4" BSP female swivel connector, any number of these can be joined together to reach the required water depth.

The last hose is fitted with a quick connector for connection to the sub sea harness.

FEATURES

- Hoses are filled with oil and pressure tested prior to dispatch.
- All hoses are marked with serial numbers for clear identification.
- The reel is supplied with multiple 30, 50, 100 or 120 metre lengths of high pressure hose to suit the working depth.
- Minimum burst pressure 4500 bar
- Minimum bend radius is 150 mm.



Each end of the hose is fitted with a 1/4" BSP female swivel connector

Manufacturing, R&D, and Operations

Address: 8 Dufresne Loop Luling, LA 70070
Tel: 985-785-3075
Email: info@torqlite.com
www.torqlite.com

Sales Headquarters

Address: 5335 Brystone Dr. Houston, TX 77041
Tel: 713-983-7171
Email: sales@torqlite.com
www.torqlite.com