

HYDRAULIC HOSES



TorqLite's flexible hydraulic hoses have been designed for use with TorqLite tools. They are available for various operating pressures, with different end configurations designated by the part number.

SPECIFICATION


TorqLite's flexible hydraulic link pressure hoses are manufactured from a multi-spiral reinforced polymer, with a clear PVC cover for additional operator protection and resistance against abrasion and corrosion.

The hoses, connectors, and pumps are all color coded to ensure the correct hoses are used with the correct tools.

The hose configuration can be specified by the part number using the following format:



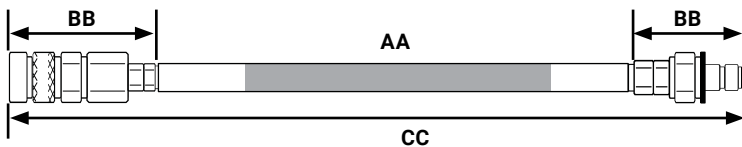

BT-AABB-CC

- AA – Refers to the maximum operating pressure
- BB – Refers to the end configuration
- CC – Refers to the length



For example, a 5-meter 1500-bar hose with a tee block and coupling would be BT-1548-5.

See the following table for designation numbers:


Standard Operating Pressures	AA	Standard End Configuration	BB	Standard Lengths	CC
1500 bar	15	Coupling/Nipple 	40	1.5 meter	1.5
2500 bar	25	Coupling/Coupling 	41	2 meter	2
		Nipple/Nipple 	42	3 meter	3
		Tee Block/Coupling 	48	4 meter	4
				5 meter	5
				6 meter	6
				8 meter	8
				10 meter	10

APPLICATION



- High-pressure service for use with petroleum or synthetic hydraulic fluids and chemical fluids.
- High-pressure delivery for hydraulic tensioning tools and other equipment.
- Applications used across various industries worldwide, with working pressure up to 150MPa.

FEATURES

- Hoses are filled with oil and pressure tested prior to dispatch.
- All hoses are marked with serial numbers for clear identification.
- Regardless of configuration, all hoses come fitted with quick connectors and dust caps.
- All hoses come standard with safety locking couplings.

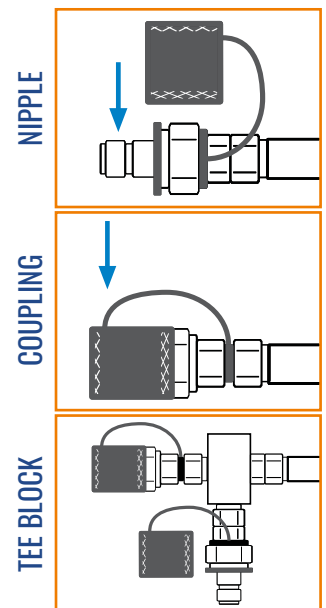

Special hose assemblies can be made to meet your needs. Please send details of your requirements for a fast response.

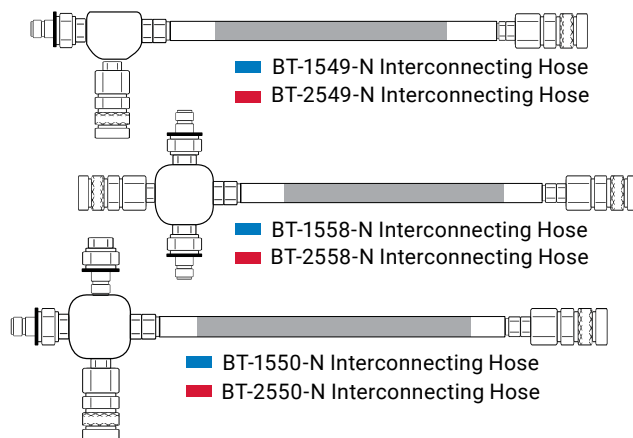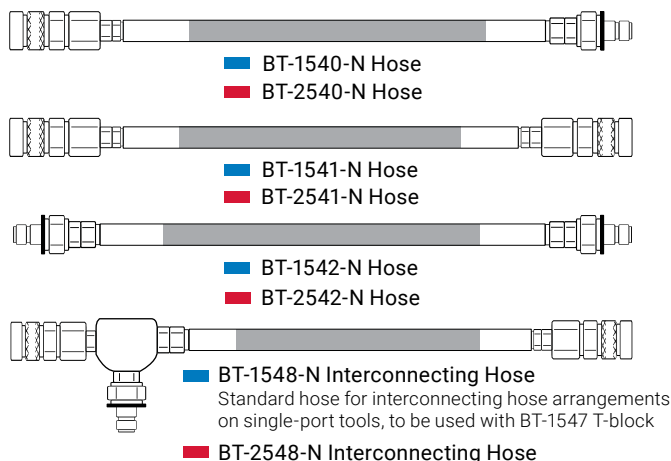

1500-BAR HOSE SPECIFICATION

Construction	Material	
Inner Core	POM	
Bond	Special adhesive	
Pressure Reinforcement	Two-spiral layer of ultra-high tensile steel wire	
Outer Cover	PA Blue	

Dimensions	SI Units	Imperial Units
Inner Ø	4.9mm + 0.1mm	0.193in + 0.0004in
Outer Ø	9.5mm + 0.1mm	0.374in + 0.0004in
Bend Radius	95mm	3.74in
Weight	0.14kg/m	0.094lb/ft

Performance	SI Units	Imperial Units
Min Burst Pressure	370.0MPa	54,375psi
Max Working Pressure	150.0MPa	21,750psi
Safety Factor	2.5:1	
Working Temperature	-10° C to +70° C	14° F to 158° F
Change in Length	+2 percent	
Impulse Strength	More than 20,000 impulse cycles at WP	
Volumetric Expansion	Typical value: 14 percent at WP	
Electrical Conductivity	Yes	

2500-BAR HOSE SPECIFICATION

Construction	Material		Imperial Units
Inner Core	POM		0.193in + 0.0004in
Bond	Special adhesive		0.374in + 0.0004in
Pressure Reinforcement	Six-spiral layer of ultra-high tensile steel wire		3.74in
Outer Cover	PA Red		0.094lb/ft

Dimensions	SI Units	Imperial Units
Inner Ø	4.8mm + 0.1mm	0.189in + 0.0004in
Outer Ø	12.9mm + 0.1mm	0.507in + 0.0004in
Bend Radius	175mm	6.889in
Weight	0.41kg/m	0.90lb/ft

Performance	SI Units	Imperial Units
Min Burst Pressure	625.0MPa	90,648psi
Max Working Pressure	250.0MPa	36,259psi
Safety Factor	2.5:1	
Working Temperature	-40° C to +100° C	-40° F to +212° F
Change in Length	+2 percent	

OIL INFORMATION

Selecting the correct high-quality oil improves functionality for your hydraulic system. The viscosity will determine how easily the oil is pumped into and drained out of the tank. The type of pump you choose will determine the appropriate viscosity.

Viscosity Applications

ISO 10	Recommended for hand pumps and higher temperature environments
ISO 32	Recommended for hand, air, or electric pumps and suitable for most environments
ISO 46	Recommended for electric pumps

Manufacturing, R&D, and Operations

Address: 8 Dufresne Loop Luling, LA 70070
 Tel: 985-785-3075
 Email: info@torqlite.com
 www.torqlite.com

Sales Headquarters

Address: 5335 Brystone Dr. Houston, TX 77041
 Tel: 713-983-7171
 Email: sales@torqlite.com
 www.torqlite.com

TORQLITE